

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications


2.7 socket programming with UDP and TCP

P2P file distribution: BitTorrent

- file divided into 256Kb chunks
- peers in torrent send/receive file chunks


tracker: tracks peers participating in torrent

torrent: group of peers exchanging chunks of a file

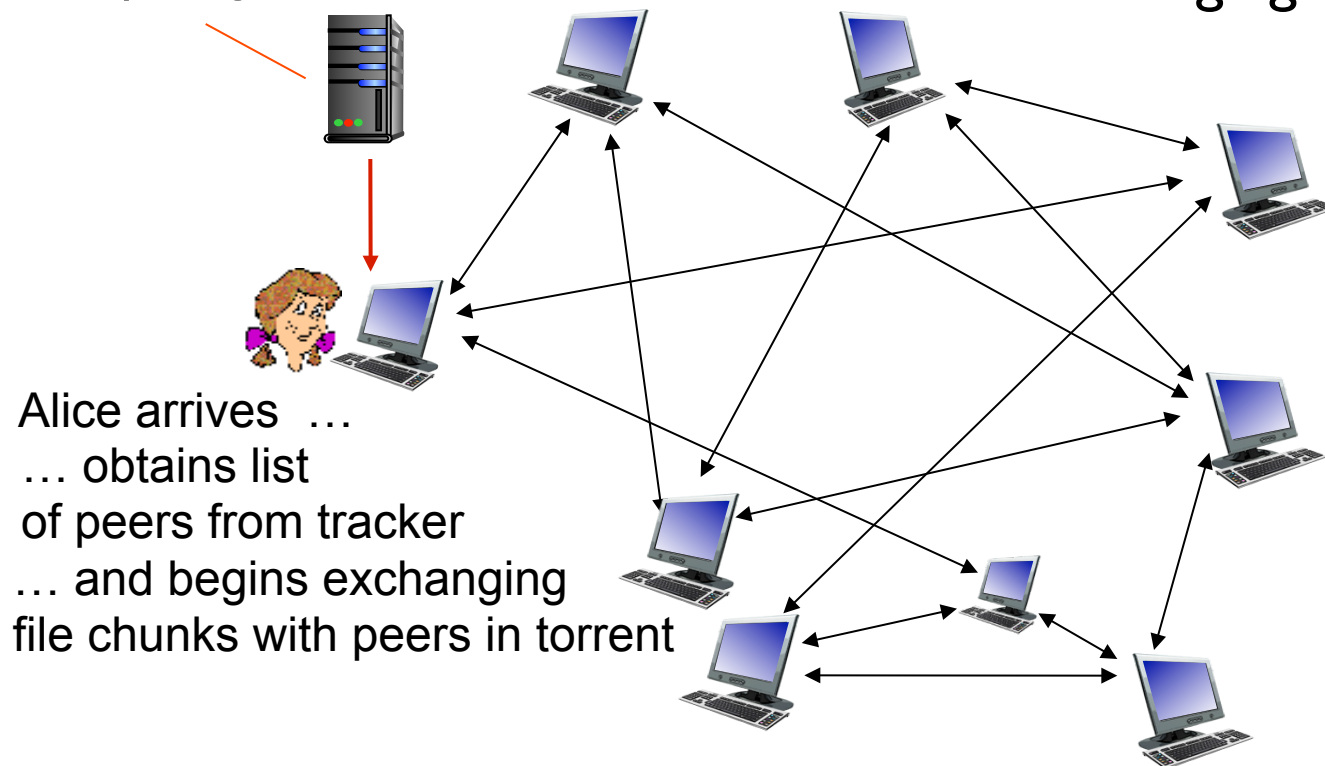

P2P file distribution: BitTorrent

- peer joining torrent:
 - has no chunks, but will accumulate them over time from other peers
 - registers with tracker to get list of peers, connects to subset of peers (“neighbors”)
- while downloading, peer uploads chunks to other peers
- peer may change peers with whom it exchanges chunks
- *churn*: peers may come and go
- once peer has entire file, it may (selfishly) leave or (altruistically) remain in torrent

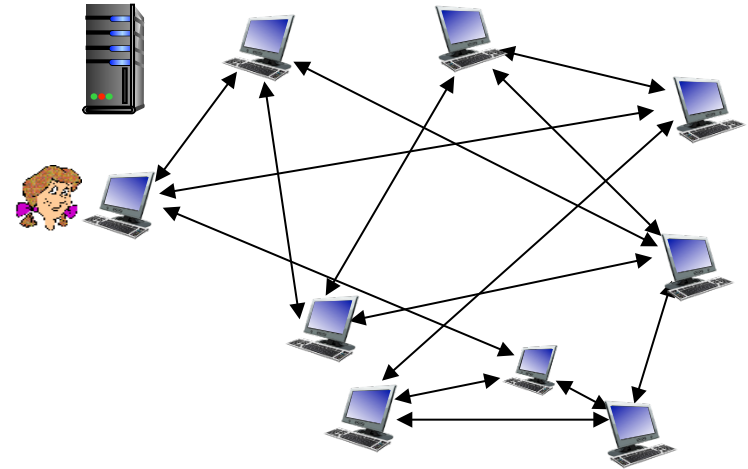

BitTorrent: requesting, sending file chunks

requesting chunks:


- at any given time, different peers have different subsets of file chunks
- periodically, Alice asks each peer for list of chunks that they have
- Alice requests missing chunks from peers, rarest first

sending chunks: tit-for-tat

- Alice sends chunks to those four peers currently sending her chunks *at highest rate*
 - other peers are choked by Alice (do not receive chunks from her)
 - re-evaluate top 4 every 10 secs
- every 30 secs: randomly select another peer, starts sending chunks
 - “optimistically unchoke” this peer
 - newly chosen peer may join top 4

BitTorrent: tit-for-tat

- (1) Alice “optimistically unchokes” Bob
- (2) Alice becomes one of Bob’s top-four providers; Bob reciprocates
- (3) Bob becomes one of Alice’s top-four providers

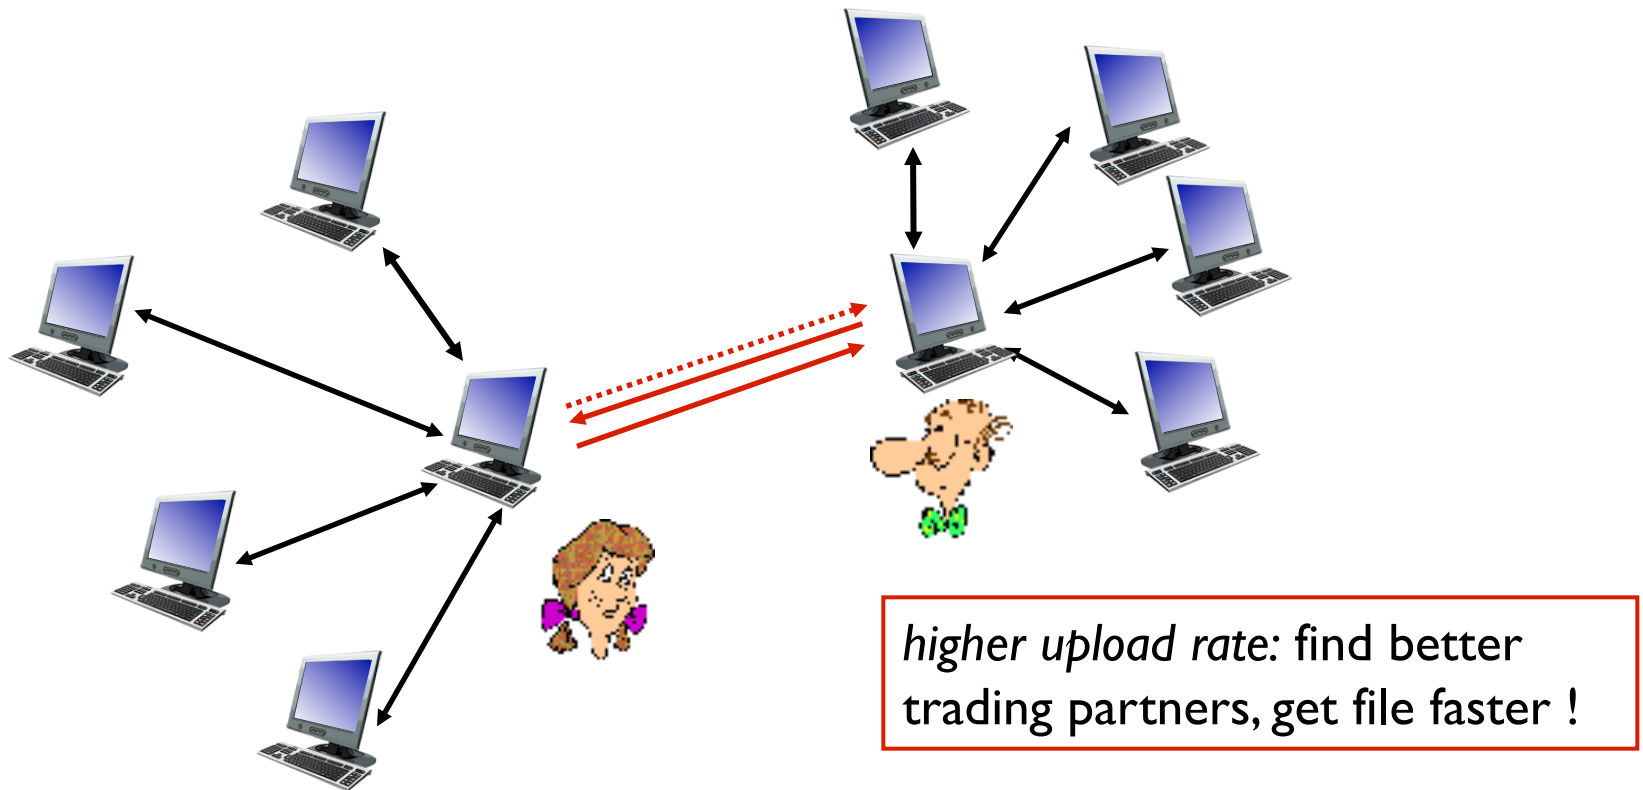

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS


2.5 P2P applications

2.7 socket programming with UDP and TCP

Socket programming

goal: learn how to build client/server applications that communicate using sockets

socket: door between application process and end-end-transport protocol

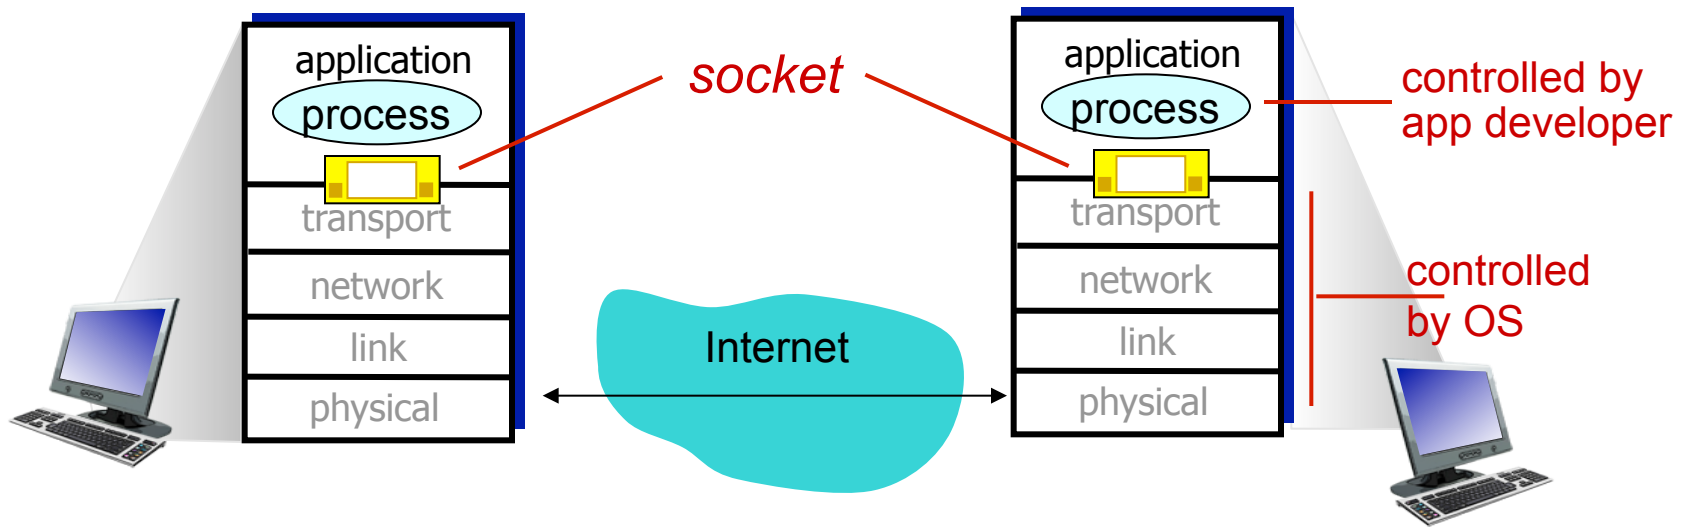

Socket programming

Two socket types for two transport services:

- **UDP:** unreliable datagram
- **TCP:** reliable, byte stream-oriented

Application Example:

1. client reads a line of characters (data) from its keyboard and sends data to server
2. server receives the data and converts characters to uppercase
3. server sends modified data to client
4. client receives modified data and displays line on its screen

Socket programming *with UDP*

UDP: no “connection” between client & server

- no handshaking before sending data
- sender explicitly attaches IP destination address and port # to each packet
- receiver extracts sender IP address and port# from received packet

UDP: transmitted data may be lost or received out-of-order

Application viewpoint:

- UDP provides *unreliable* transfer of groups of bytes (“datagrams”) between client and server

Client/server socket interaction: UDP

server (running on serverIP)

create socket, port= x:
`serverSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
read datagram from
`serverSocket`

↓
write reply to
`serverSocket`
specifying
client address,
port number

client

create socket:
`clientSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
Create datagram with server IP and
port=x; send datagram via
`clientSocket`

↓
read datagram from
`clientSocket`

↓
close
`clientSocket`

Example app: UDP client

Python UDPClient

include Python's socket library

→ from socket import *

serverName = 'hostname'

serverPort = 12000

create UDP socket for server

→ clientSocket = socket(AF_INET,
SOCK_DGRAM)

get user keyboard input

→ message = raw_input('Input lowercase sentence:')

Attach server name, port to message; send into socket

→ clientSocket.sendto(message.encode(),
(serverName, serverPort))

read reply characters from socket into string

→ modifiedMessage, serverAddress =
clientSocket.recvfrom(2048)

print out received string and close socket

→ print modifiedMessage.decode()
clientSocket.close()

Example app: UDP server

Python UDP Server

```
from socket import *
serverPort = 12000

create UDP socket → serverSocket = socket(AF_INET, SOCK_DGRAM)
bind socket to local port number 12000 → serverSocket.bind(("", serverPort))

print ("The server is ready to receive")

loop forever → while True:
    Read from UDP socket into message, getting client's address (client IP and port) → message, clientAddress = serverSocket.recvfrom(2048)
    modifiedMessage = message.decode().upper()

    send upper case string back to this client → serverSocket.sendto(modifiedMessage.encode(), clientAddress)
```

Socket programming *with TCP*

client must contact server

- server process must first be running
- server must have created socket (door) that welcomes client's contact

client contacts server by:

- Creating TCP socket, specifying IP address, port number of server process
- *when client creates socket:* client TCP establishes connection to server TCP

- when contacted by client, *server TCP creates new socket* for server process to communicate with that particular client
 - allows server to talk with multiple clients
 - source port numbers used to distinguish clients (more in Chap 3)


application viewpoint:

TCP provides reliable, in-order byte-stream transfer (“pipe”) between client and server

Client/server socket interaction: TCP

server (running on `hostid`)

client

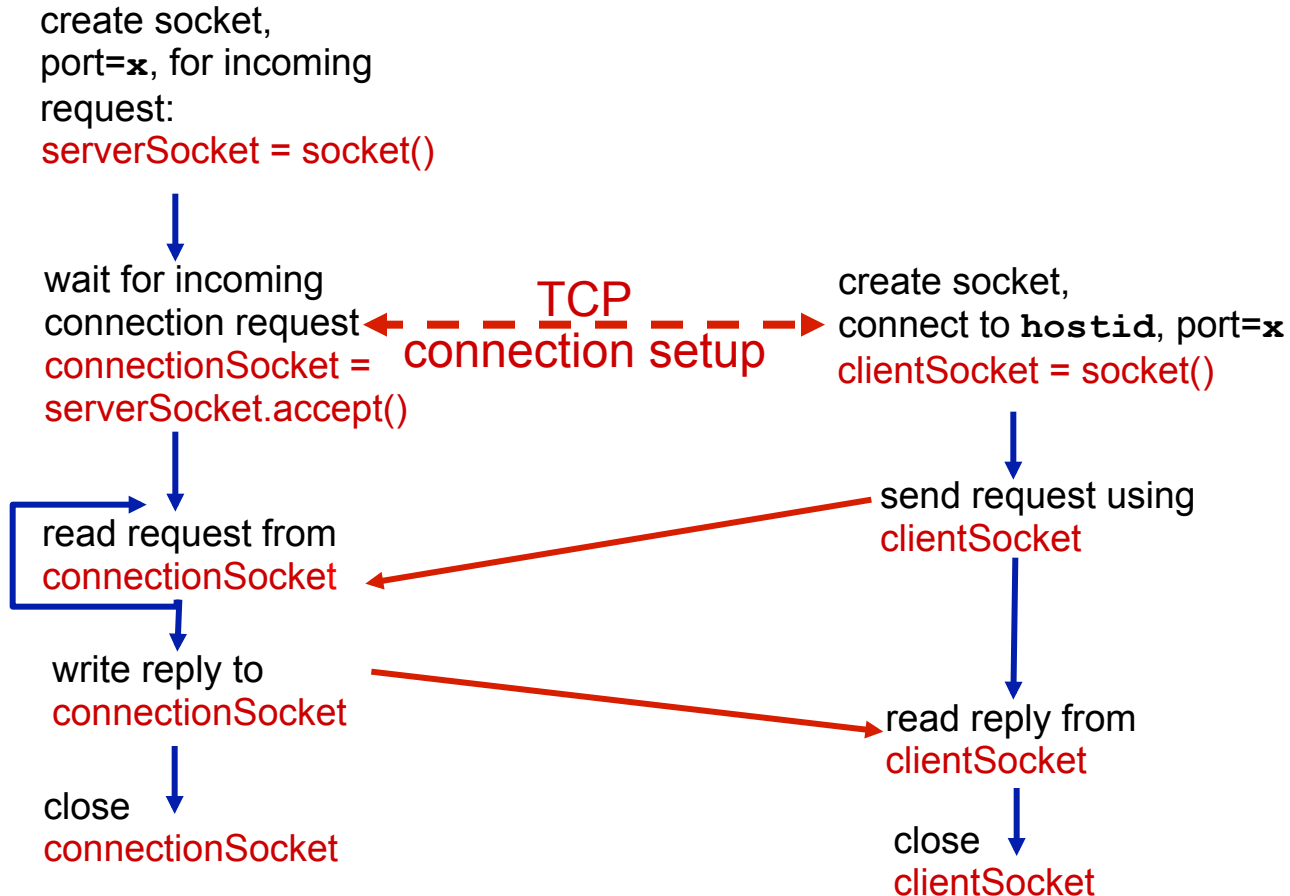

Example app: TCP client

Python TCPClient

```
from socket import *
```

```
serverName = 'servername'
```

```
serverPort = 12000
```

create TCP socket for
server, remote port 12000

```
clientSocket = socket(AF_INET, SOCK_STREAM)
```

```
clientSocket.connect((serverName,serverPort))
```

```
sentence = raw_input('Input lowercase sentence:')
```

No need to attach server
name, port

```
clientSocket.send(sentence.encode())
```

```
modifiedSentence = clientSocket.recv(1024)
```

```
print ('From Server:', modifiedSentence.decode())
```

```
clientSocket.close()
```

Example app: TCP server

Python TCPServer

create TCP welcoming
socket

server begins listening for
incoming TCP requests

loop forever

server waits on accept()
for incoming requests, new
socket created on return

read bytes from socket (but
not address as in UDP)

close connection to this
client (but *not* welcoming
socket)

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET,SOCK_STREAM)
serverSocket.bind(('',serverPort))
serverSocket.listen(1)
print 'The server is ready to receive'

while True:
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()
    capitalizedSentence = sentence.upper()
    connectionSocket.send(capitalizedSentence.
                           encode())
    connectionSocket.close()
```


Chapter 2: summary

our study of network apps now complete!

- application architectures
 - client-server
 - P2P
- application service requirements:
 - reliability, bandwidth, delay
- Internet transport service model
 - connection-oriented, reliable: TCP
 - unreliable, datagrams: UDP
- specific protocols:
 - HTTP
 - SMTP, POP, IMAP
 - DNS
 - P2P: BitTorrent
- video streaming, CDNs
- socket programming:
TCP, UDP sockets

Chapter 2: summary

most importantly: learned about protocols!

- typical request/reply message exchange:
 - client requests info or service
 - server responds with data, status code
- message formats:
 - *headers*: fields giving info about data
 - *data*: info(payload) being communicated

important themes:

- control vs. messages
 - in-band, out-of-band
- centralized vs. decentralized
- stateless vs. stateful
- reliable vs. unreliable message transfer
- “complexity at network edge”